






Self-contained ice maker - Sprayer system Daily production up to 36 kg

Position n°



Available dice size



Application fields

Restaurant		Supermarket SPA Medical	
Disco	•••••	Industry	• • • • • • • •

• Features & Plus

- Full cube, compact and crystalline
- Extrernal structure AISI 304 Scotch Brite
- Side grilles for better ventilation
- Removable side panels
- Electromechanical functionning
- Air Cooling and Water Cooling systems
- Standard and special voltages
- Insulated retractable door
- ON-OFF switch
- Internal bin insulation HCFC free
- Conformity to RoHS directive
- Easy cleaning thanks to rounded surfaces
- Model in Tropical Class + 43 ° C
- External protective filter, removable, easy to clean
- Undercounter model

• Prod. 24h

Air temp.	Water temp.	Prod. 24h kg
10° C	10° C	36
21° C	15° C	32
32° C	21° C	26

2 Years Warranty subject to limitations

• Certifications available for this model


































Self-contained ice maker - Sprayer system Daily production up to 36 kg

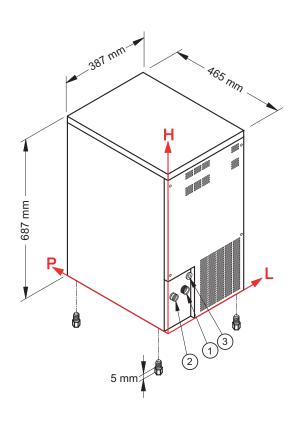

Connections

All measures are referred to the rear bottom-left corner (L-H-Ø)

- 1 Water inlet: 129 mm - 137 mm - 3/4"
- 2 Water outlet: 56 mm - 137 mm - 24 mm
- ③ Electrical connection: 89 mm - 180 mm

Working conditions

- Location: Indoor

	Min	Max
Ambient temperature	+10° C	+43° C
Water temperature	+3° C	+32° C
Voltage	-10%	+10%
Water inlet pressure	1bar (14 psi)	6bar (84 psi)

Technical information

Production in 24h	32 kg
Store capacity, up to	9 kg
Cooling system	A - W
Kind of cube	14- 17 -32-41 g
Refrigerant	R404A - R452A
Standard voltage	220-240 V ~ 50 Hz
Electrical consumption	350 W
Fuse	10 A
Water consumption	A: 5,1 l/kg
	W: 16 l/kg
Sizes (L-P-H mm)	387 - 465 - 687
Sizes with pack (L-P-H r	mm) 440 - 520 - 860
Net weight	38 kg
Gross weight	44 kg
Finish	AISI 304 stainless steel, scotch brite

All the technical information must be considered at the following conditions:



feet





Ambient temperature +21° C



Water temperature +15° C



Electrical consumptionat +43° C (standard voltage)

Models and specifications are subject to change without notice Rev. 02 - Issued September 2019







