






Self-contained ice maker - Sprayer system Daily production up to 49 kg

Position n°



Available dice size



Application fields

Restaurant	••••••	Supermarket SPA Medical	
Disco	••••••	Industry	• • • • • • • •

• Features & Plus

- Full cube, compact and crystalline
- Extrernal structure AISI 304 Scotch Brite
- Side grilles for better ventilation
- Removable side panels
- Electromechanical functionning
- Air Cooling and Water Cooling systems
- Standard and special voltages
- Insulated retractable door
- ON-OFF switch
- Internal bin insulation HCFC free
- Conformity to RoHS directive
- Easy cleaning thanks to rounded surfaces
- Model in Tropical Class + 43 ° C
- External protective filter, removable, easy to clean
- Adjustable Stainless Steel feet
- Undercounter model

• Prod. 24h

Air temp.	Water temp.	Prod. 24h kg
10° C	10° C	49
21° C	15° C	46
32° C	21° C	40

2 Years Warranty subject to limitations

• Certifications available for this model


































Self-contained ice maker - Sprayer system Daily production up to 49 kg

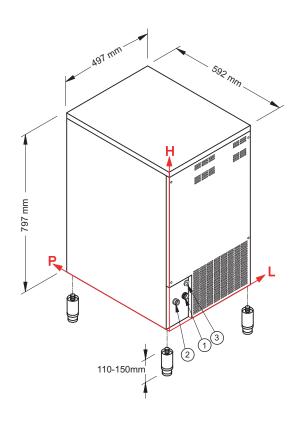

Connections

All measures are referred to the rear bottom-left corner (L-H-Ø)

- ① Water inlet: 129 mm - 132 mm - 3/4"
- ② Water outlet: 56 mm 154 mm 24 mm
- ③ Electrical connection: 94 mm 202 mm

Working conditions

- Location: Indoor

	Min	Max
Ambient temperature	+10° C	+43° C
Water temperature	+3° C	+32° C
Voltage	-10%	+10%
Water inlet pressure	1bar (14 psi)	6bar (84 psi)

• Technical information

Production in 24h	46 kg
Store capacity, up to	25 kg
Cooling system	A - W
Kind of cube	14- 17 -32-41 g
Refrigerant	R404A - R452A
Standard voltage	220-240 V ~ 50 Hz
Electrical consumption	450 W
Fuse	10 A
Water consumption	A: 4 l/kg
	W: 18 l/kg
Sizes (L-P-H mm)	497 - 592 - 797
Sizes with pack (L-P-H r	mm) 550 - 660 - 970
Net weight	52 kg
Gross weight	61 kg
Finish	AISI 304 stainless steel, scotch brite

All the technical information must be considered at the following conditions:











Sizes without feet

Standard Cube (17 g) Ambient temperature +21° C

ient Water rature temperature ° C +15° C Electrical consumption at +43° C (standard voltage)

Refrigerant R404A

Models and specifications are subject to change without notice Rev. 01 - Issued May 2018





