

DESCRIPTION



Capacity: 10 x 1/1 GN



Trays insertion: Lengthwise



Dimensions: 710 x 826 x H 933 mm



Control panel: Analogic



Indicative quantity of meals: 120



Cooking chamber heating : Electric




Steam generation: Direct system

COOKING MODES AND FUNCTIONING

	Convection mode	Temperature range between 50 °C and 270 °C
	Steam mode	Temperature range between 50 °C and 100 °C
	Convection-Steam mode	Temperature range between 50 °C and 270 °C
	Reduced fan speed	2 ventilation speed selectable
	Autoreverse	Automatic reversal of the rotation direction of the fan
	Cool down	Quick cooling down of the cooking chamber, with open door, through the cooking chamber fan.

COMPONENT DESCRIPTION ON THE CONTROL PANEL

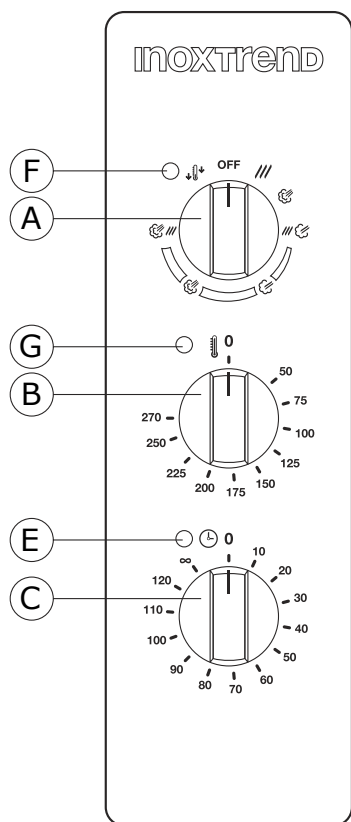

A	Cycle selector-switch
B	Cooking chamber thermostat
C	Timer
E	Timer ON pilot light
F	Oven power supply ON pilot light
G	Heating cooking chamber ON pilot light

MANUFACTURING FEATURES

- Heating system located on the right side of the cooking chamber;
- Waterproof cooking chamber with rounded edges and deflector panels in stainless steel AISI 304;
- Cooking chamber with external welding;
- External covering panels made of satin stainless steel AISI 430;
- Base chassis made of stainless steel AISI 430;
- Door hinges in stainless steel AISI 304;
- Heating element made of stainless steel Incoloy 800;
- Thermal insulation of the cooking chamber in ceramics fibre;
- Cooking chamber fan made of stainless steel;

DIMENSIONS


	oven	package
Width	710 mm	750 mm
Depth (with door handle)	827 mm	870 mm
Height	933 mm	1100 mm
Weight/volume		124 kg/0.72 m ³

POWER SUPPLY

Power loading	12.0 kW
Cooking chamber power	11.6 kW
Power of the motors	n° 2 x 250 W
Max. power loading	12.0 kW
Voltage	380 - 415 V +3N ~ 50/60 Hz
Absorbed current	20 A
Feed cable section	n° 5 x 4.0 mm ²
Capacity	10 x 1/1 GN
Pitch between the trays	67 mm

WATER SUPPLY

Water supply coupling	Ø ¾" gas
Water pressure	1.5 - 2.5 bar
Water hardness	4 - 12 °f 40 - 120 ppm
Water conductivity	50 e 2000 µS/cm
Chlorine concentr. Cl ₂	< 0.2 mg/litre
Chloride concentration	<150 mg/litre
Water drain coupling	Øe 40 mm

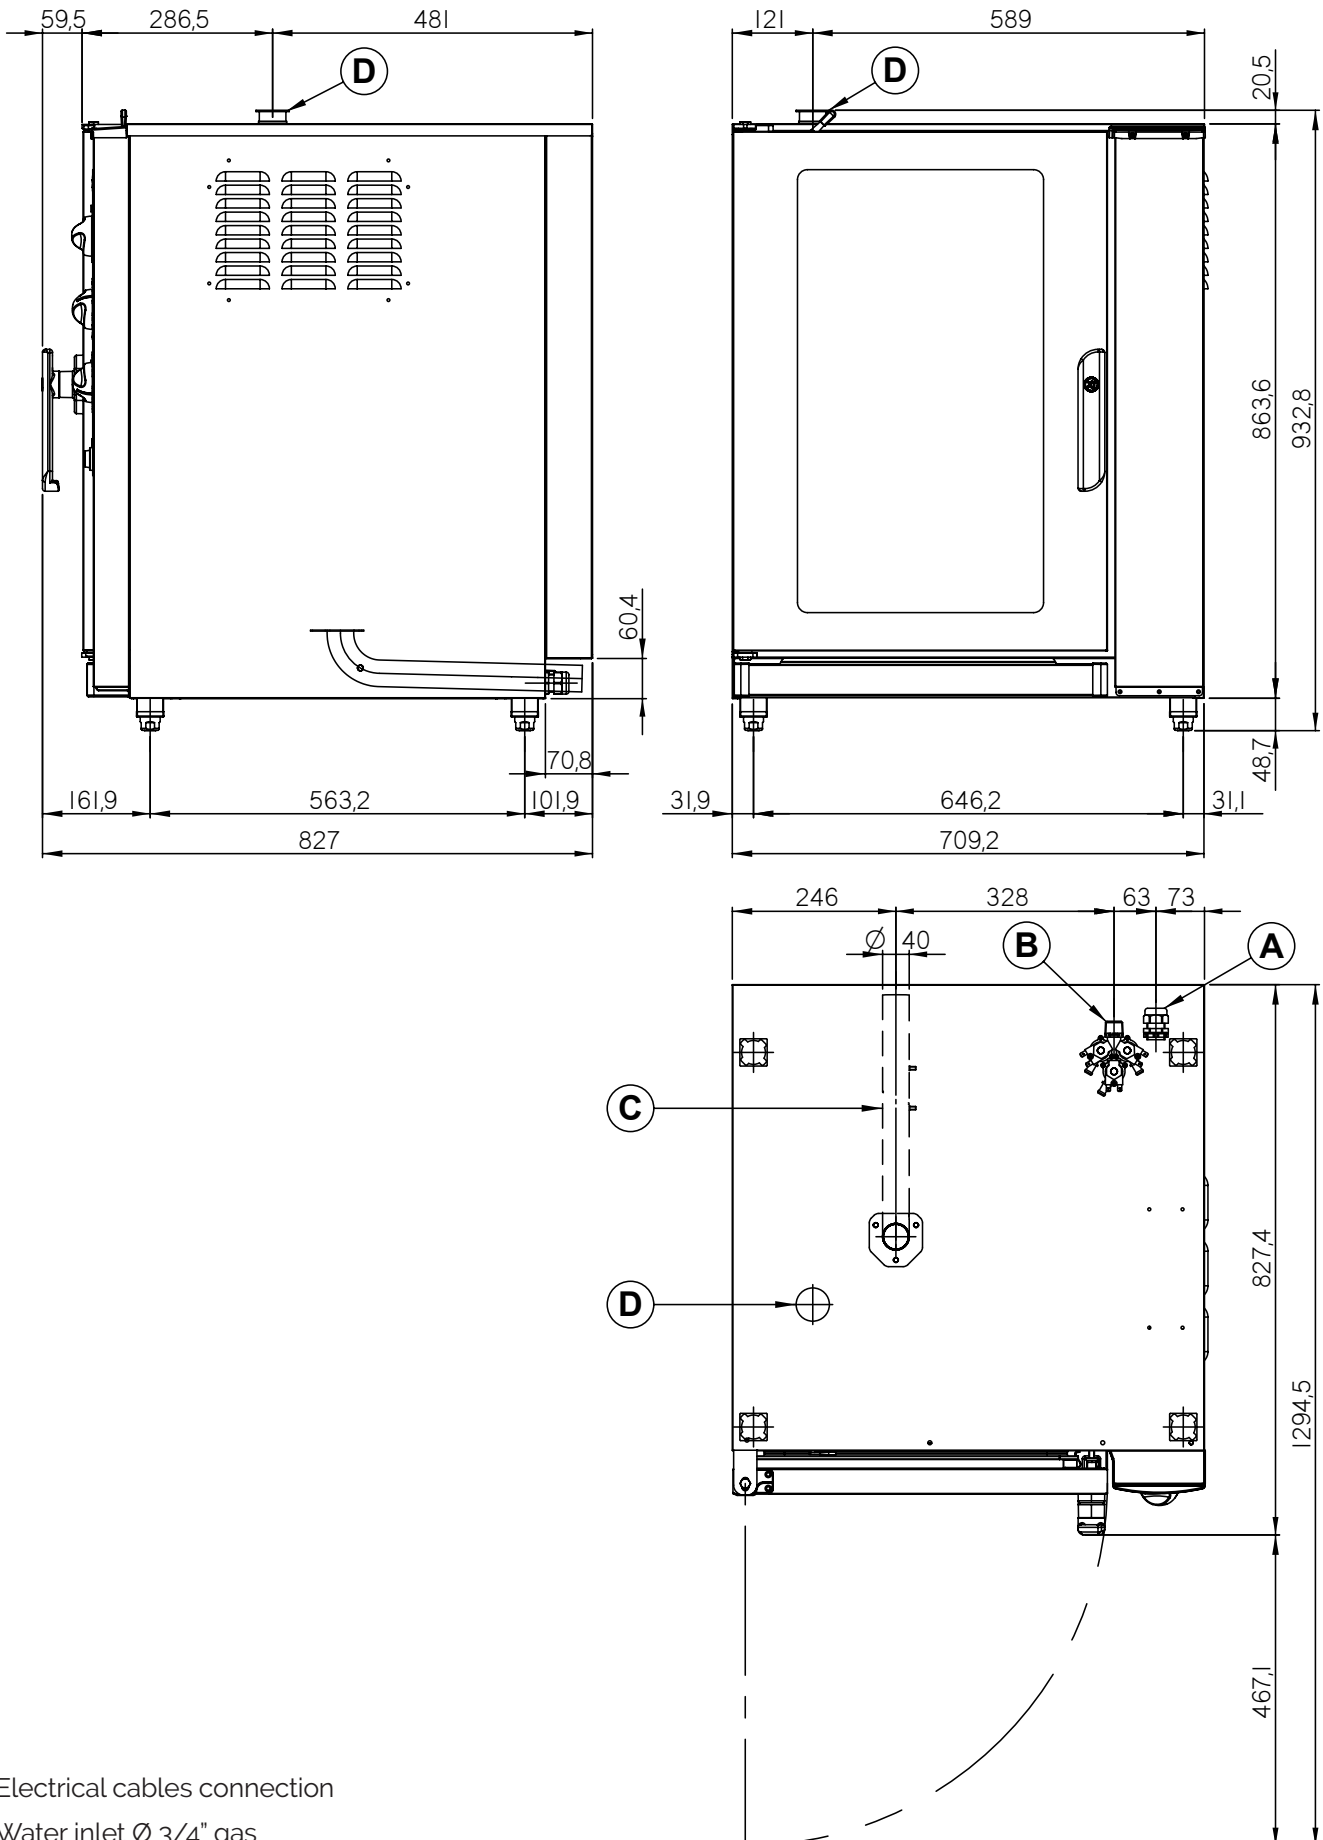

- A Electrical cables connection
- B Water inlet \varnothing 3/4" gas
- C Chamber drainage \varnothing e 40 mm
- D Cooking chamber release valve