

MXG 428

EXTREME

Scotsman
Ice Systems

Modular Ice Machine up to 195 kg

| |
|-----------|
| Item #: |
| Project: |
| Quantity: |



FEATURES

- Individual transparent solid cube: each single cube is an artwork: crystal clear and perfectly shaped, faithful to the Scotsman tradition.
- Global standard footprint: strictly follows international imperial standard commonly adopted in the industry of reference.
- Agion: the technology that makes products cleaner and longer lasting with built-in protection working 24/7 to resist the growth of microbes and the development of unpleasant odors.
- Electronic control: ambient and water temperatures may change throughout the years but your ice will stay the same.
- External indicator lights: keeps ice maker's operations under constant surveillance.
- Front access condenser air filter: a do-it-yourself cleaning operation that saves time and money and makes your ice maker live longer.
- Clean alert: advises with a blink when it's time to clean the filter.
-



MXG L 428
Large Gourmet 39 g
Ø 38 x H 41 mm



MXG M 428
Medium Gourmet 20 g
Ø 30 x H 34 mm



MXG S 428
Small Gourmet 8 g
Ø 21 x H 25 mm

CONDENSING SYSTEM

Air cooled
Water cooled

REFRIGERANT GAS

R404A

VOLTAGE V/Hz/ph

230/50/1
230/60/1

RECOMMENDED BINS

| Head | Bins | | kg |
|---------|-------------|---------|---------------|
| | ✓ | SB193 | 129 |
| | ✓ | SB322 | 168 |
| | BINTOPMKG55 | SB550 | 252 |
| MXG 428 | ● | UBH1100 | 553 |
| | ● | UBH1600 | 812 |
| | ● | SIS700 | 318 + 73 |
| | ● | SIS1350 | 613 + 73 + 73 |

LEGEND:

- ✓ : Perfect combination between ice maker and bin
- : Ice chute cut-out performed upon installation
- CBTxxxxxxx : need additional bin top

Certifications:



OPERATING REQUIREMENTS

| | Minimum | Maximum |
|--------------------|----------------|----------------|
| Air temperature | 10°C | 43°C |
| Water temperature | 5°C | 38°C |
| Water pressure | 1 bar (14 psi) | 5 bar (70 psi) |
| Electrical voltage | -10% | +10% |

IMPORTANT NOTICE:
Models and specifications are subject to change without notice. This spec sheet is meant for commercial purpose only. For technical documentation please refer to our service manuals.

Download our free **App Scotsman Ice**
Apple store
Google play
Windows store



www.scotsman-ice.it
www.scotsman-ice.com

Modular Ice Machine up to 195 kg

MXG 428


EXTREME

Scotsman
Ice Systems

Modular Ice Machine up to 195 kg

| |
|-----------|
| Item #: |
| Project: |
| Quantity: |

Modular Ice Machine up to 195 kg

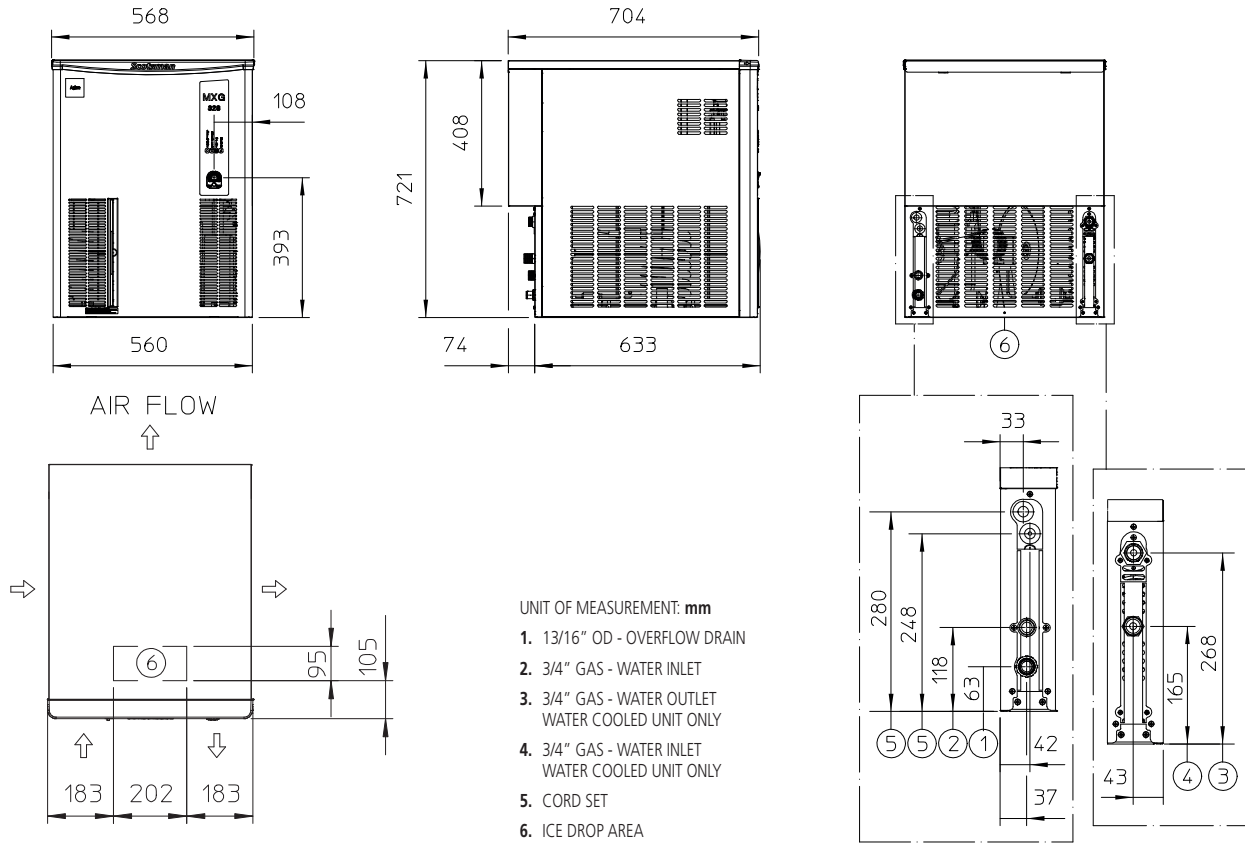

| UNIT DATA | Compressor | | | | Circuit wires | | Max. fuse size |
|--------------------|--------------------|----------|-------|------|---------------|------------------|----------------|
| | Version | Voltage | Btu/h | W | No. | Ømm ² | A |
| Size (W x D x H) | 568 x 704 x 721 mm | | | | | | |
| Net weight | 66 kg | | | | | | |
| SHIPPING DATA | | | | | | | |
| Carton (W x D x H) | 630 x 770 x 910 mm | | | | | | |
| Weight | 77 kg | | | | | | |
| | MXG L 428 AS | 230/50/1 | 17163 | 5030 | 3 | 1.5 | 16 |
| | MXG M 428 AS | 230/50/1 | 17163 | 5030 | 3 | 1.5 | 16 |
| | MXG M 428 AS | 230/60/1 | 20207 | 5922 | 3 | 1.5 | 16 |
| | MXG S 428 AS | 230/50/1 | 17163 | 5030 | 3 | 1.5 | 16 |
| | MXG L 428 WS | 230/50/1 | 17163 | 5030 | 3 | 1.5 | 16 |
| | MXG M 428 WS | 230/50/1 | 17163 | 5030 | 3 | 1.5 | 16 |
| | MXG S 428 WS | 230/50/1 | 17163 | 5030 | 3 | 1.5 | 16 |

| Version | Condensation | Voltage | 24 h ice production kg °C Amb. / °C Water | | | Energy consumption* | | Water usage* | Instant power |
|--------------|--------------|----------|--|-----------|-----------|---------------------|---------|--------------|---------------|
| | | | 10°C/10°C | 21°C/10°C | 32°C/21°C | kWh/100 kg | kWh/24h | l/h | W |
| MXG L 428 AS | Air | 230/50/1 | 167 | 167 | 130 | 26.5 | 34.5 | 13.8 | 1750 |
| MXG M 428 AS | Air | 230/50/1 | 190 | 180 | 128 | 28.7 | 36.7 | 15.4 | 1850 |
| MXG M 428 AS | Air | 230/60/1 | 180 | 169 | 128 | 32.0 | 41.0 | 16.3 | 2000 |
| MXG S 428 AS | Air | 230/50/1 | 195 | 182 | 135 | 28.9 | 39.0 | 20.8 | 2000 |
| MXG L 428 WS | Water | 230/50/1 | 172 | 170 | 147 | 20.4 | 30.0 | 106.3 | 1400 |
| MXG M 428 WS | Water | 230/50/1 | 195 | 190 | 165 | 19.5 | 32.2 | 150.0 | 1400 |
| MXG S 428 WS | Water | 230/50/1 | 195 | 192 | 170 | 20.0 | 34.0 | 185.4 | 1400 |

(*) Data refer to 32°C Amb. / 21°C Water temperature conditions